



Lightline 150



The Lightline150 is a new version of the Linear Led bars.
Available as RGBW/ FC, MONOCHROMATIC and WHITE BALANCE versions.
Configuration by DRS Setup.


Available in 4 different measures:

- Standard 90 cm.
- On request 60 - 120 - 150 cm

- Standard fixture colour finishing: grey . Optional black and white.

TECHNICAL FEATURES

ITEM	FIXTURE	90cm standard	60cm	120cm	150cm
LEDs	RGBW	12 (5050-20W-RTBH)	8 (5050-20W-RTBH)	16 (5050-20W-RTBH)	20 (5050-20W-RTBH)
Total light power		40W	32W	80W	100W
Lumen		R 750, G 1800, B 300, W 1700	R 500, G 1200, B 200, W 1130	R 1000, G 2400, B 400, W 2260	R 1250, G 3000, B 500, W 2830
Optics		8°, 15°, 40°, 60°, 10°x30°			
Power consumption		45W	37W	87W	110W
Voltage range		Universal 100 - 240Vac			
Physical		944x93x115 mm	664x93x115 mm	1212x93x115 mm)	1484x93x115 mm
Weight		4,4 Kg	-	-	-
Control		Standard interface: RS-485, Protocol: RDM / DMX 512, Artnet by external converter			
Connections		Signal: 3pin IP 67 connector (male-female) possibility to link up to 32 devices in chain Main Power: 3pin IP 67 connector (male-female) possibility to link up to 21 devices at 230V or 11 devices at 120V in chain.			
Setup		RDM Control/configuration or individually by DRS (remote control device) Dedicated DMX channel for white balance DMX or Auto mode with Master-Slave function Halogen simulation CYM simulation Flicker-free function Smooth dimming function			
DMX channels		9CH mode, 6CH mode, 5CH mode, 4CH mode			

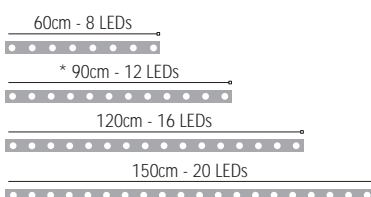

ONE 4 ALL S.r.l.

Cascina Avalle, 23 | 15038, Ottiglio Monferrato (AL) | ITALY | +39 0142 921338
www.one4all.it | info@one4all.it

